



LIFT SHAFT, CAR, C.W. & MACHINE ROOM PLAN

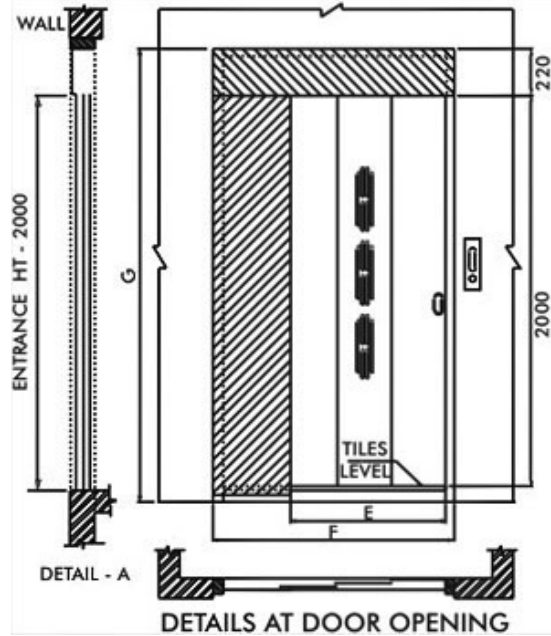

DETAILS AT DOOR OPENING

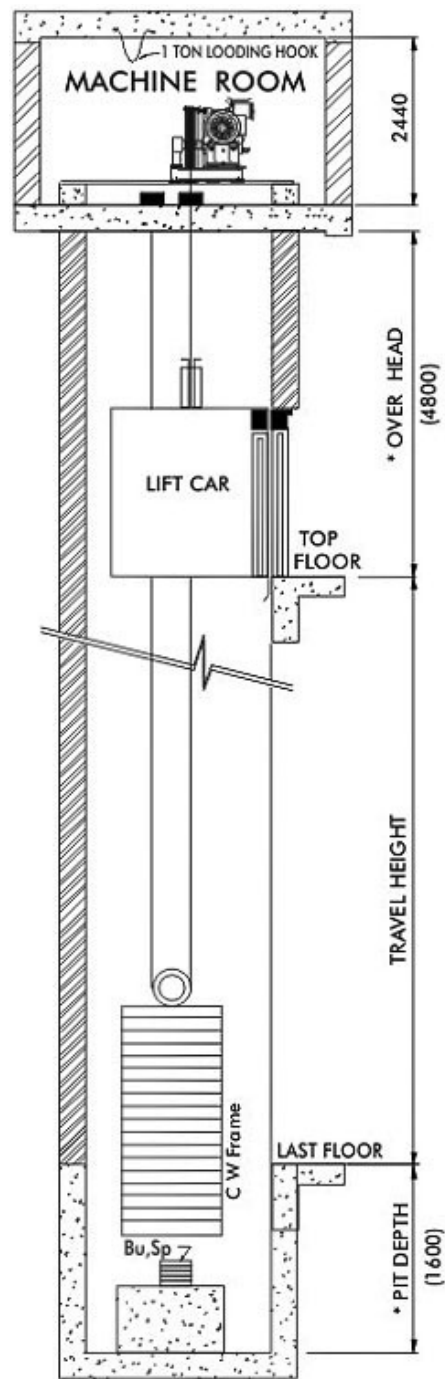

(SECTION : X-X)

LIFT WELL

Lift well section

Hospital List with imperforated/ Swing/ Collapsible Manual Door (std. speed - 0.35 m/s)

Load		Car Inside		Lift Well		Entrance	Imperforated Door Frame	
Persons	kg	A	B	C	D	E	Width - F	Height - G
15	1020	1000	2400	1600	2800	800	1250	2290
20	1360	1300	2400	2200	2800	1000	1550	2290
26	1768	1600	2400	2400	2800	1200	1800	2290

Automatic Centre Opening Door Lifts (std. speed - 0.35 m/s)

Load		Car Inside		Lift Well		Entrance
Persons	kg	A	B	C	D	E
15	1020	1000	2400	1900	2800	800
20	1360	1300	2400	2300	2800	1000
26	1768	1600	2400	2600	2800	1200

Automatic Telescopic Door Lifts (std. speed - 0.35 m/s)

Load		Car Inside		Lift Well		Entrance
Persons	kg	A	B	C	D	E
15	1020	1000	2400	1750	2800	800
20	1360	1300	2400	2100	2800	1000
26	1768	1600	2400	2400	2800	1200